

DESCRIPTION

The HY62V8200-(I)/HY62U8200-(I) is a high speed, low power and 2M bit CMOS SRAM organized as 262,144 words by 8bit. The HY62V8200-(I) / HY62U8200-(I) uses high performance CMOS process technology and designed for high speed low power circuit technology. It is particularly well suited for used in high density low power system application. This device has a data retention mode that guarantees data to remain valid at a minimum power supply voltage of 2.0V.

FEATURES

- Fully static operation and Tri-state output
- TTL compatible inputs and outputs
- Battery backup(L/LL-part)
 - 2.0V(min) data retention
- Standard pin configuration
 - 32pin 8x20mm TSOP-I / 8x13.4mm TSOP-I (Standard and Reversed)


Product No.	Voltage (V)	Speed (ns)	Operation Current(mA)	Standby Current(uA)		Temperature (°C)
				L	LL	
HY62V8200	3.3	70*/85/100	5	50	15	0~70(Normal)
HY62V8200-I	3.3	70*/85/100	5	50	20	-40~85(E.T.)
HY62U8200	3.0	70*/85/100	5	50	15	0~70(Normal)
HY62U8200-I	3.0	70*/85/100	5	50	20	-40~85(E.T.)

Note 1. E.T. : Extended Temperature, Normal : Normal Temperature


2. Current value is max.

3. * measured with 30pF test load

PIN CONNECTION



sTSOP-I/TSOP-I(Standard)




sTSOP/TSOP-I(Reversed)

PIN DESCRIPTION

Pin Name	Pin Function
/CS1	Chip Select 1
CS2	Chip Select 2
/WE	Write Enable
/OE	Output Enable
A0 ~ A17	Address Input
I/O1 ~ I/O8	Data Input/Output
Vcc	Power(3.3V or 3.0V)
Vss	Ground

BLOCK DIAGRAM

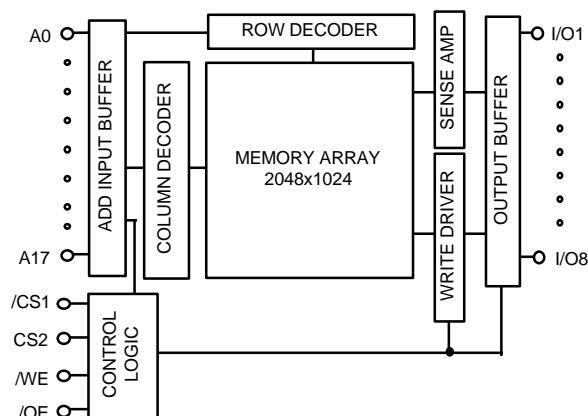

ORDERING INFORMATION

Part No.	Speed	Power	Temp.	Package
HY62V8200LT1	70*/85/100	L-part		TSOP-I(Standard)
HY62V8200LLT1	70*/85/100	LL-part		TSOP-I(Standard)
HY62V8200LR1	70*/85/100	L-part		TSOP-I(Reversed)
HY62V8200LLR1	70*/85/100	LL-part		TSOP-I(Reversed)
HY62V8200LST	70*/85/100	L-part		Small TSOP-I(Standard)
HY62V8200LLST	70*/85/100	LL-part		Small TSOP-I(Standard)
HY62V8200LSR	70*/85/100	L-part		Small TSOP-I(Reversed)
HY62V8200LLSR	70*/85/100	LL-part		Small TSOP-I(Reversed)
HY62V8200LT1-I	70*/85/100	L-part	E.T.	TSOP-I(Standard)
HY62V8200LLT1-I	70*/85/100	LL-part	E.T.	TSOP-I(Standard)
HY62V8200LR1-I	70*/85/100	L-part	E.T.	TSOP-I(Reversed)
HY62V8200LLR1-I	70*/85/100	LL-part	E.T.	TSOP-I(Reversed)
HY62V8200LST-I	70*/85/100	L-part	E.T.	Small TSOP-I(Standard)
HY62V8200LLST-I	70*/85/100	LL-part	E.T.	Small TSOP-I(Standard)
HY62V8200LSR-I	70*/85/100	L-part	E.T.	Small TSOP-I(Reversed)
HY62V8200LLSR-I	70*/85/100	LL-part	E.T.	Small TSOP-I(Reversed)
HY62U8200LT1	70*/85/100	L-part		TSOP-I(Standard)
HY62U8200LLT1	70*/85/100	LL-part		TSOP-I(Standard)
HY62U8200LR1	70*/85/100	L-part		TSOP-I(Reversed)
HY62U8200LLR1	70*/85/100	LL-part		TSOP-I(Reversed)
HY62U8200LST	70*/85/100	L-part		Small TSOP-I(Standard)
HY62U8200LLST	70*/85/100	LL-part		Small TSOP-I(Standard)
HY62U8200LSR	70*/85/100	L-part		Small TSOP-I(Reversed)
HY62U8200LLSR	70*/85/100	LL-part		Small TSOP-I(Reversed)
HY62U8200LT1-I	70*/85/100	L-part	E.T.	TSOP-I(Standard)
HY62U8200LLT1-I	70*/85/100	LL-part	E.T.	TSOP-I(Standard)
HY62U8200LR1-I	70*/85/100	L-part	E.T.	TSOP-I(Reversed)
HY62U8200LLR1-I	70*/85/100	LL-part	E.T.	TSOP-I(Reversed)
HY62U8200LST-I	70*/85/100	L-part	E.T.	Small TSOP-I(Standard)
HY62U8200LLST-I	70*/85/100	LL-part	E.T.	Small TSOP-I(Standard)
HY62U8200LSR-I	70*/85/100	L-part	E.T.	Small TSOP-I(Reversed)
HY62U8200LLSR-I	70*/85/100	LL-part	E.T.	Small TSOP-I(Reversed)

Note 1. E.T. : Extended Temperature, Blank : Normal Temperature

2. * measured with 30pF test load.

ABSOLUTE MAXIMUM RATING (1)

Symbol	Parameter	Rating	Unit	Remark
V _{IN} , V _{OUT}	Voltage on any pin relative to V _{SS}	-0.2 to 3.9	V	
V _{CC}	Voltage on V _{CC} supply relative to V _{SS}	-0.2 to 4.0	V	
T _A	Operating Temperature	0 to 70	°C	HY62V8200 HY62U8200
		-40 to 85	°C	HY62V8200-I HY62U8200-I
T _{STG}	Storage Temperature	-55 to 150	°C	
P _D	Power Dissipation	1.0	W	
I _{OUT}	Data Output Current	50	mA	
T _{SOLDER}	Lead Soldering Temperature & Time	260 • 5	°C•sec	

Note

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is stress rating only and the functional operation of the device under these or any other conditions above those indicated in the operation of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect reliability.

RECOMMENDED DC OPERATING CONDITION

Symbol	Parameter	Product	Min.	Typ.	Max.	Unit
V _{CC}	Supply Voltage	HY62V8200-(I)	3.0	3.3	3.6	V
		HY62U8200-(I)	2.7	3.0	3.3	V
V _{SS}	Ground	HY62V8200-(I)	0	0	0	V
		HY62U8200-(I)				
V _{IH}	Input High Voltage	HY62V8200-(I) HY62U8200-(I)	2.2	-	V _{CC} +0.2	V
V _{IL}	Input Low Voltage	HY62V8200-(I) HY62U8200-(I)	-0.2(1)	-	0.4	V

Note

- V_{IL} = -1.5V for pulse width less than 30ns

TRUTH TABLE

/CS1	CS2	/WE	/OE	MODE	I/O OPERATION	Current
H	X	X	X	Standby	High-Z	I _{sb}
X	L	X	X		High-Z	I _{sb} , I _{sb1}
L	H	H	H	Output Disabled	High-Z	I _{cc}
L	H	H	L	Read	Data Out	I _{cc}
L	H	L	X	Write	Data In	I _{cc}

Note :

- H=V_{IH}, L=V_{IL}, X=don't care

DC ELECTRICAL CHARACTERISTICS

V_{CC} = 3.3V±10%/3.0V±10%, T_A = 0°C to 70°C (Normal)/ -40°C to 85°C (E.T.), unless otherwise specified

Sym.	Parameter		Test Condition	Min.	Typ.	Max.	Unit			
I _{LI}	Input Leakage Current		V _{SS} ≤ V _{IN} ≤ V _{CC}	-1	-	1	μA			
I _{LO}	Output Leakage Current		V _{SS} ≤ V _{OUT} ≤ V _{CC} , /CS1 = V _{IH} or CS2 = V _{IL} or /OE = V _{IH} or /WE = V _{IL}	-1	-	1	μA			
I _{CC}	Operating Power Supply Current		/CS1 = V _{IL} , CS2 = V _{IH} , V _{IN} = V _{IH} or V _{IL} , I _{I/O} = 0mA	-	-	5	mA			
I _{CC1}	Average Operating Current		/CS1 = V _{IL} CS2 = V _{IH} , Min Duty Cycle = 100%, I _{I/O} = 0mA	70ns	-	-	60	mA		
				85ns	-	-	50	mA		
				100ns	-	-	50	mA		
I _{SB}	TTL Standby Current (TTL Input)		/CS1 = V _{IH} or CS2 = V _{IL}	-	-	0.5	mA			
I _{SB1}	Standby Current (CMOS Input)	HY62V8200	/CS1 ≥ V _{CC} - 0.2V	L	-	-	50	μA		
				LL	-	-	15	μA		
		HY62V8200-I		CS2 ≥ 0.2V or	L	-	-	50	μA	
					LL	-	-	20	μA	
		HY62U8200			CS2 ≥ V _{CC} - 0.2V	L	-	-	50	μA
						LL	-	-	15	μA
		HY62U8200-I				L	-	-	50	μA
						LL	-	-	20	μA
V _{OL}	Output Low Voltage		I _{OL} = 2.1mA			-	-	0.4	V	
V _{OH}	Output High Voltage		I _{OH} = -1mA			2.2	-	-	V	

Note : Typical values are at V_{CC} = 3.3V/3.0V, T_A = 25°C

AC CHARACTERISTICS

V_{CC} = 3.3V±10%/3.0V±10%, T_A = 0°C to 70°C (Normal)/ -40°C to 85°C (E.T.), unless otherwise specified

#	Symbol	Parameter	-70		-85		-10		Unit
			Min.	Max.	Min.	Max.	Min.	Max.	
READ CYCLE									
1	t _{RC}	Read Cycle Time	70	-	85	-	100	-	ns
2	t _{AA}	Address Access Time	-	70	-	85	-	100	ns
3	t _{ACS}	Chip Select Access Time	-	70	-	85	-	100	ns
4	t _{OE}	Output Enable to Output Valid	-	40	-	45	-	50	ns
5	t _{CLZ}	Chip Select to Output in Low Z	10	-	10	-	10	-	ns
6	t _{OLZ}	Output Enable to Output in Low Z	5	-	5	-	5	-	ns
7	t _{CHZ}	Chip Deselection to Output in High Z	0	20	0	25	0	30	ns
8	t _{OHZ}	Out Disable to Output in High Z	0	20	0	25	0	30	ns
9	t _{OH}	Output Hold from Address Change	15	-	15	-	15	-	ns
WRITE CYCLE									
10	t _{WC}	Write Cycle Time	70	-	85	-	100	-	ns
11	t _{CW}	Chip Selection to End of Write	60	-	70	-	80	-	ns
12	t _{AW}	Address Valid to End of Write	60	-	70	-	80	-	ns
13	t _{AS}	Address Set-up Time	0	-	0	-	0	-	ns
14	t _{WP}	Write Pulse Width	50	-	60	-	70	-	ns
15	t _{WR}	Write Recovery Time	0	-	0	-	0	-	ns
16	t _{WHZ}	Write to Output in High Z	0	20	0	25	0	30	ns
17	t _{DW}	Data to Write Time Overlap	35	-	35	-	40	-	ns
18	t _{DH}	Data Hold from Write Time	0	-	0	-	0	-	ns
19	t _{OW}	Output Active from End of Write	5	-	5	-	5	-	ns

AC TEST CONDITIONS


T_A = 0°C to 70°C (Normal) / -40°C to 85°C (E.T.), unless otherwise specified

PARAMETER	Value
Input Pulse Level	0.4V to 2.2V
Input Rise and Fall Time	5ns
Input and Output Timing Reference Level	1.5V
Output Load	CL = 100pF + 1TTL Load
	CL* = 30pF + 1TTL Load

Note

* : Test load is 30pF for 70ns device.

AC TEST LOADS



Note : 1 Including jig and scope capacitance

CAPACITANCE


(Temp = 25°C, f= 1.0MHz)

Symbol	Parameter	Condition	Max.	Unit
C _{IN}	Input Capacitance	V _{IN} = 0V	8	pF
C _{OUT}	Output Capacitance	V _{I/O} = 0V	10	pF

Note : These parameters are sampled and not 100% tested

TIMING DIAGRAM


READ CYCLE 1

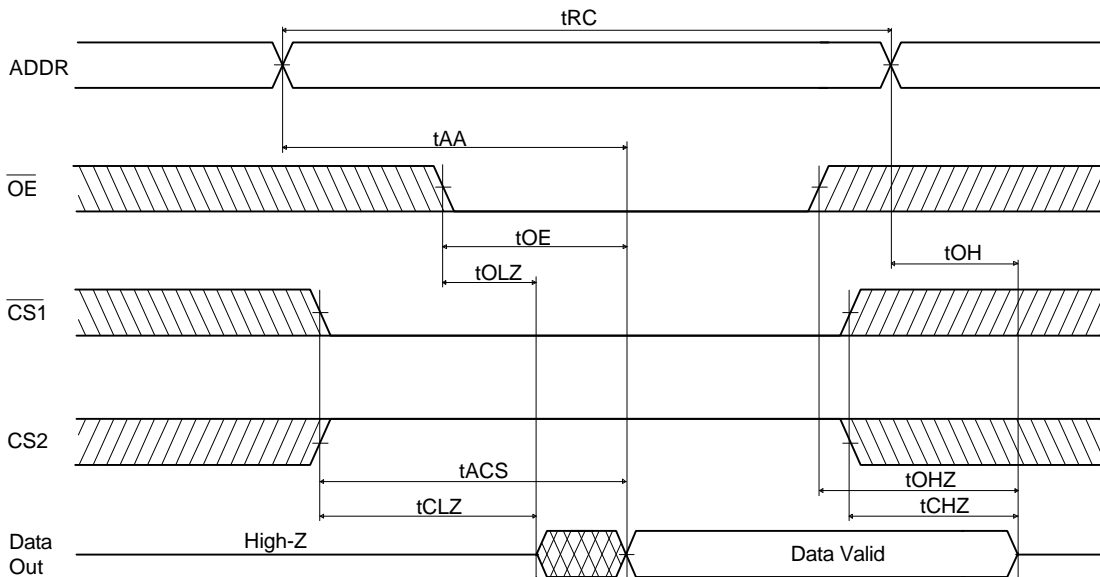

Note(READ CYCLE):



1. t_{CHZ} and t_{OHZ} are defined as the time at which the outputs achieve the open circuit conditions and are not referenced to output voltage levels
2. At any given temperature and voltage condition, t_{CHZ} max. is less than t_{CLZ} min. both for a given device and from device to device.
3. \overline{WE} is high for the read cycle.


READ CYCLE 2

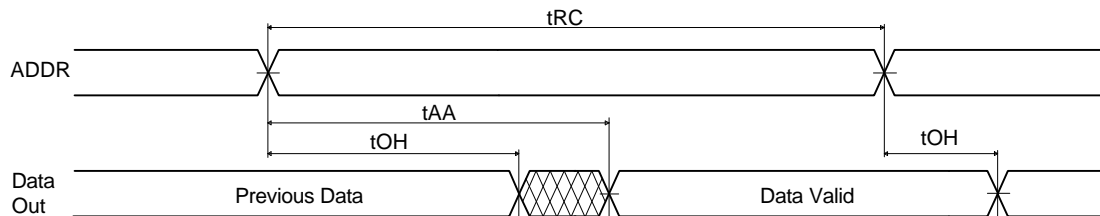

Note(READ CYCLE):

1. \overline{WE} is high for the read cycle.
2. Device is continuously selected $\overline{CS1} = V_{IL}$, $CS2 = V_{IH}$.
3. $\overline{OE} = V_{IL}$.

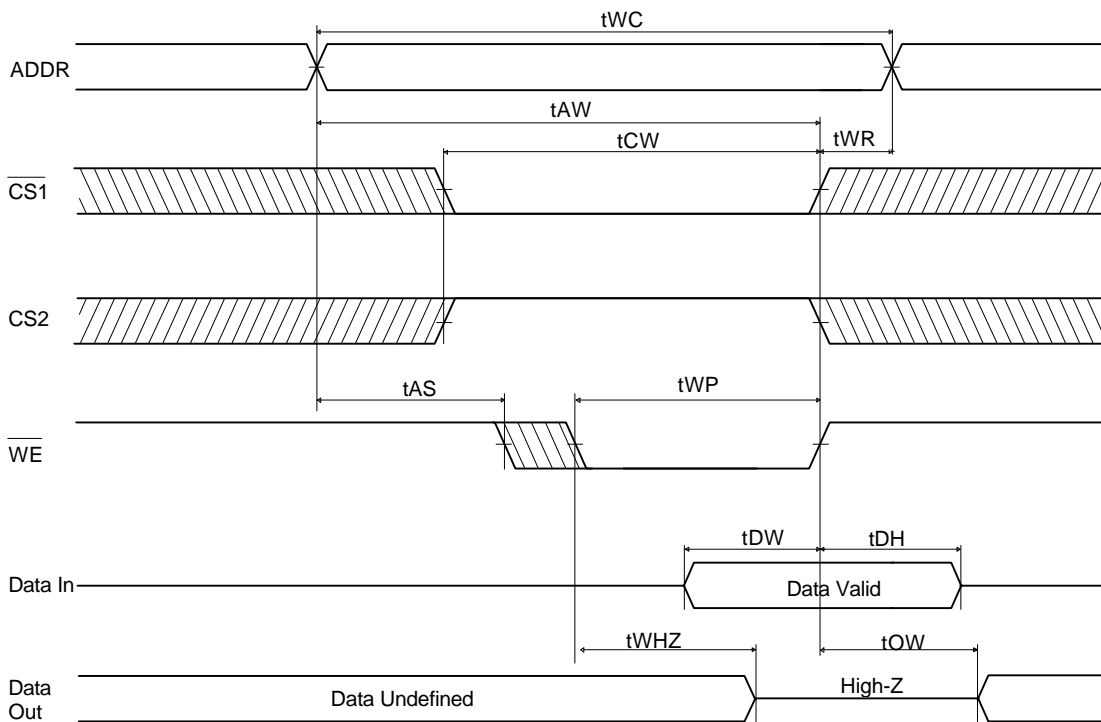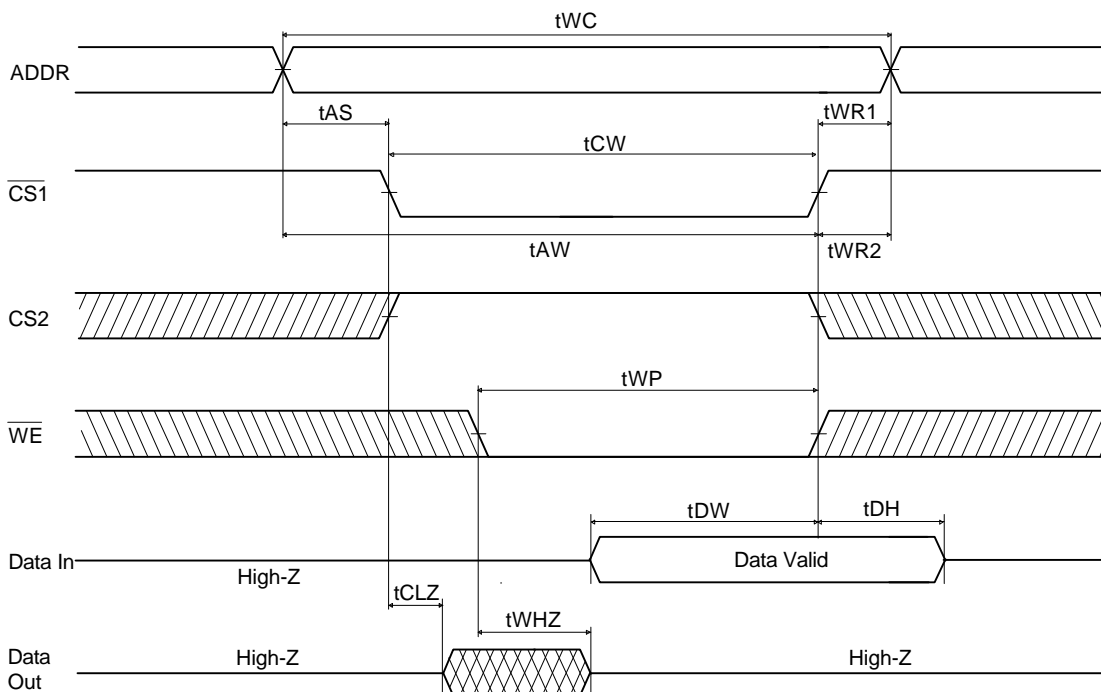WRITE CYCLE 1 (/WE Controlled)

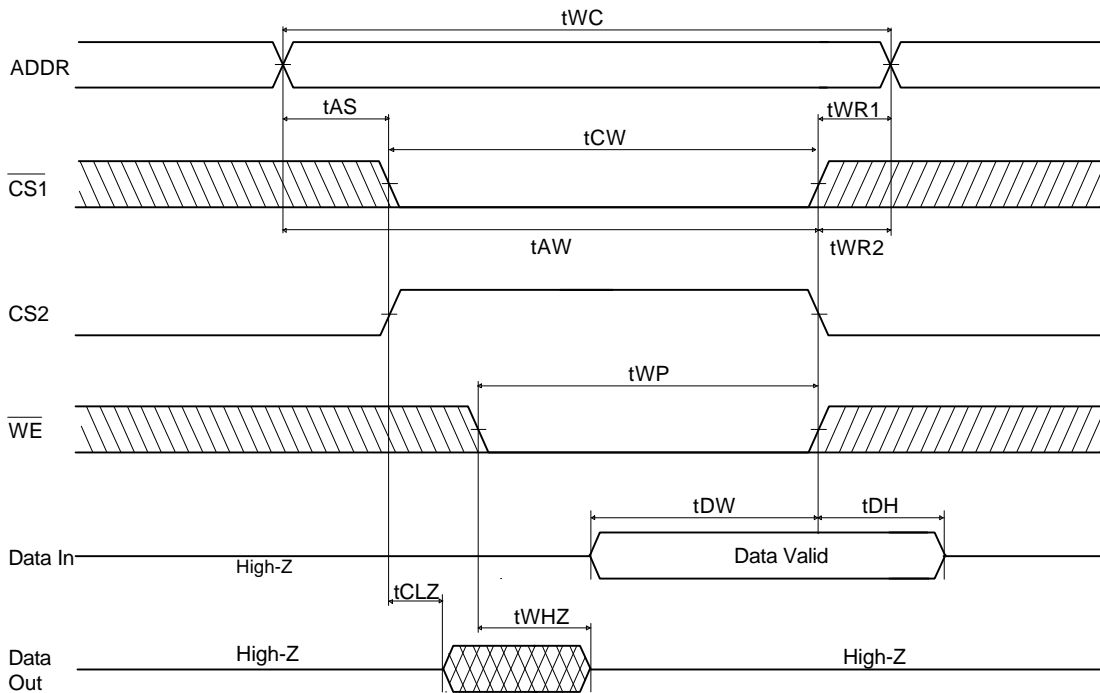WRITE CYCLE 2 (/CS1 Controlled)


WRITE CYCLE 3 (CS2 Controlled)

Notes(WRITE CYCLE):

1. A write occurs during the overlap of a low /CS1, CS2 and low /WE. A write begins at the latest transition among /CS1 going low, CS2 going high and /WE going low: A write ends at the earliest transition among /CS1 going high, CS2 low and /WE going high. t_{WP} is measured from the beginning of write to the end of write.
2. t_{CW} is measured from the later of /CS1 going low or CS2 going high to the end of write.
3. t_{AS} is measured from the address valid to the beginning of write.
4. t_{WR} is measured from the end of write to the address change. t_{WR1} is applied in case a write ends as /CS1, or /WE going high, and t_{WR2} is applied in case a write ends at CS2 going low.
5. If /OE, CS2 and /WE are in the read mode during this period, and the I/O pins are in the output low-Z state, input of opposite phase of the output must not be applied because bus contention can occur.
6. If /CS1 goes low simultaneously with /WE going low, the outputs remain in high impedance state.
7. Dout is the read data of the new address.
8. When /CS1 is low and CS2 is high, I/O pins are in the output state. The input signals in the opposite phase leading to the outputs should not be applied.

DATA RETENTION ELECTRIC CHARACTERISTIC


TA=0°C to 70°C (Normal)/-40°C to 85°C (E.T.)

Symbol	Parameter		Test Condition	Min.	Typ.	Max.	Unit			
VDR	Vcc for Data Retention		/CS1 ≥ Vcc-0.2V, CS2 ≤ 0.2V or ≥ Vcc - 0.2V, Vss ≤ VIN ≤ Vcc	2.0	-	-	V			
ICCDR	Data	HY62V8200	Vcc=3.0V, /CS1 ≥ Vcc - 0.2V, CS2 ≤ 0.2V or ≥ Vcc - 0.2V, Vss ≤ VIN ≤ Vcc	L	-	-	30	uA		
		LL		-	-	15	uA			
	Retention	HY62V8200-I		L	-	-	30	uA		
		LL		-	-	20	uA			
	Current	HY62U8200		L	-	-	30	uA		
				LL	-	-	15	uA		
		HY62U8200-I		L	-	-	30	uA		
				LL	-	-	20	uA		
Tcdr	Chip Deselect to Data Retention Time		See Data Retention Timing Diagram				0	-	-	ns
Tr	Operating Recovery Time						5	-	-	ms


Notes:

1. Typical values are under the condition of TA = 25°C.

DATA RETENTION TIMING DIAGRAM 1

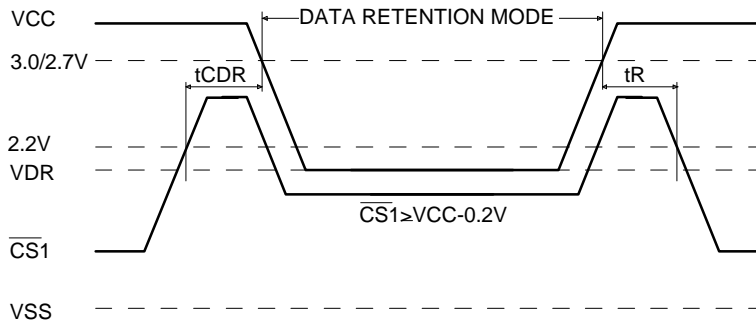

DATA RETENTION TIMING DIAGRAM 2

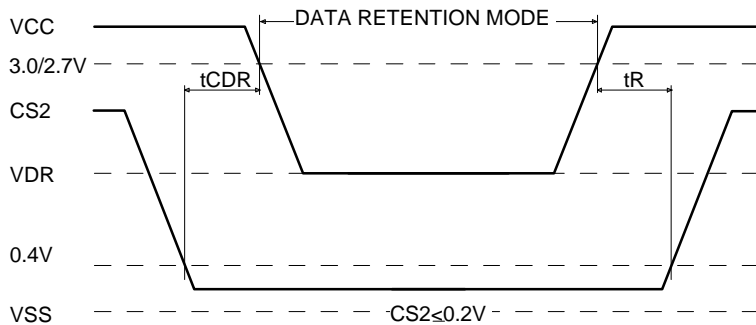

Note :



1. 3.0V : HY62V8200 and HY62V8200-I
2.7V : HY62U8200 and HY62U8200-I

RELIABILITY SPEC.



TEST MODE		TEST SPEC.
ESD	HBM	$\geq 2000V$
	MM	$\geq 250V$
LATCH - UP		$\leq -100mA$
		$\geq 100mA$

PACKAGE INFORMATION


32pin 8x20mm Thin Small Outline Package Standard(T1)

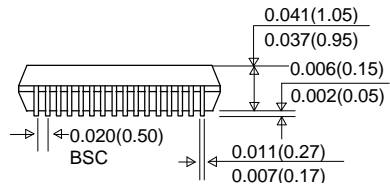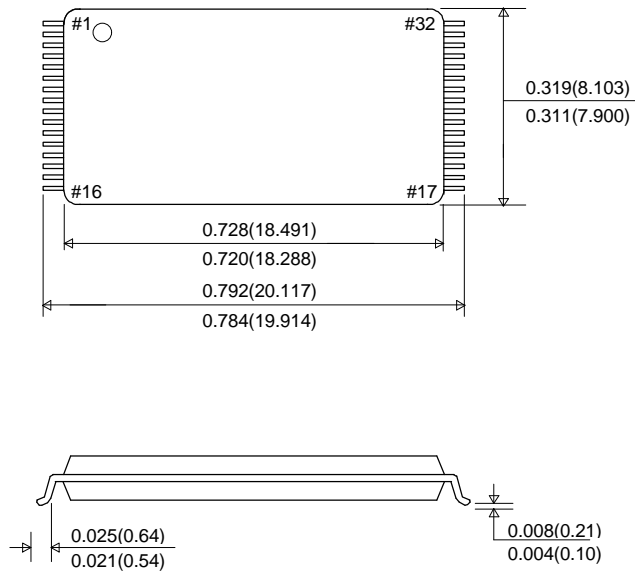

32pin 8x20mm Thin Small Outline Package Reversed(R1)

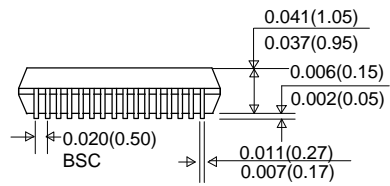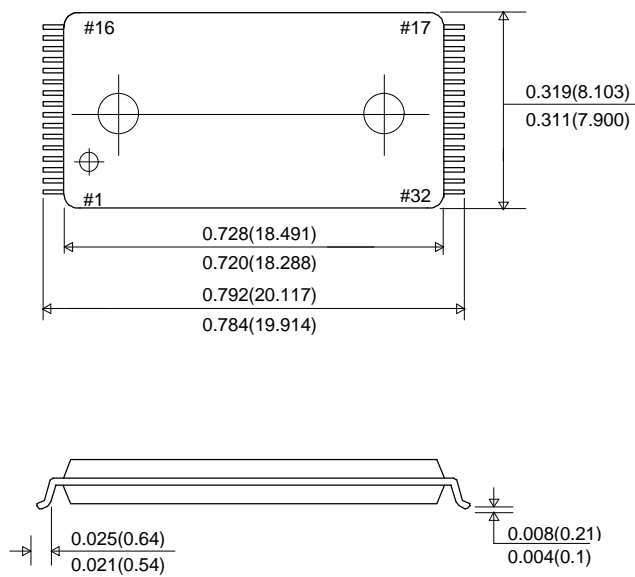

32pin 8x13.4mm Thin Small Outline Package Standard(ST)

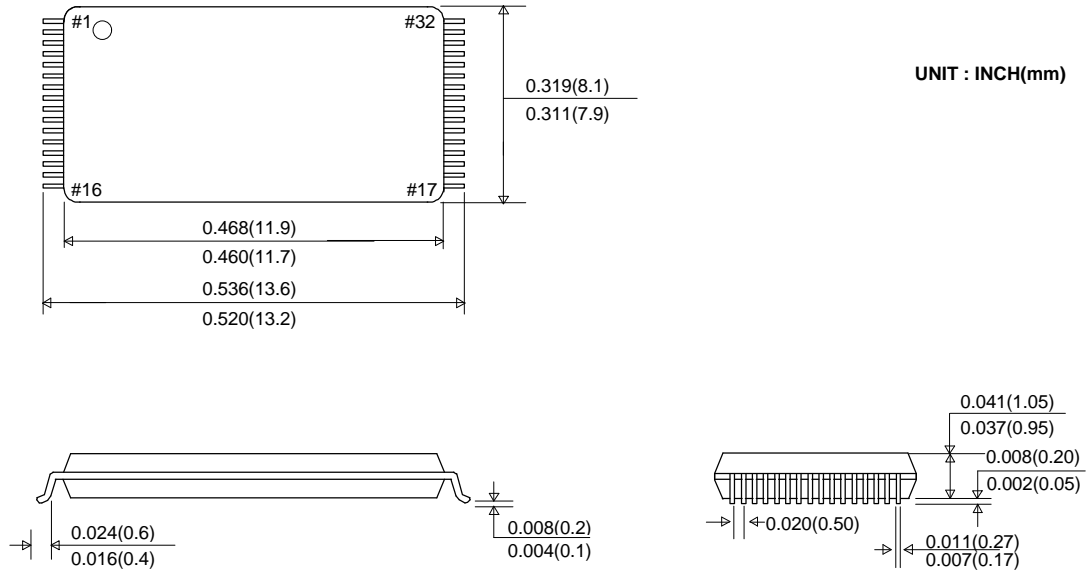

32pin 8x13.4mm Thin Small Outline Package Reversed(SR)

